REVISIONS			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	NOR S3H1521-0006, 93-04-06	94-10-28	JSR/SBC
B	NORS S5H9500-0005, 95-03-30 & S5H1507-0001, 96-06-01	96-04-25	JSR

NOTES:

1. THIS DRAWING SHALL BE INTERPRETED IN ACCORDANCE WITH APPLICABLE STANDARDS LISTED IN DOD-STD-100.
2. THE FOLLOWING ARE MANDATORY WHEN INDICATED BY ■
   - ☐ REMOVE BURRS ☐ BREAK SHARP EDGES .010 MAX
   - ☐ FILLETS R .010 MAX
   - ☐ 125 ✓ ALL OVER, EXCEPT AS NOTED
   - ☐ DIMENSIONS APPLY AFTER PLATING
   - ☐ TOLERANCES ON STOCK MATERIAL SIZES, SHALL BE AS SPECIFIED IN APPLICABLE SPECIFICATIONS.
   - ■ ANSI Y14.5-DATED 1982 APPLIES
   - ☐ FED-STD-H28 APPLIES
3. STITCHING SHOWN THUS ----------
4. STITCHING TO BE TYPE 301, OF FED-STD-751, 11 TO 13 STITCHES PER INCH. STITCHING LOCATION SHALL BE AS INDICATED.
5. STITCHING TO BE TYPE 304 OR 404, PER FED-STD-75 , 28-42 STITCHES PER INCH, 1/8 WIDTH.

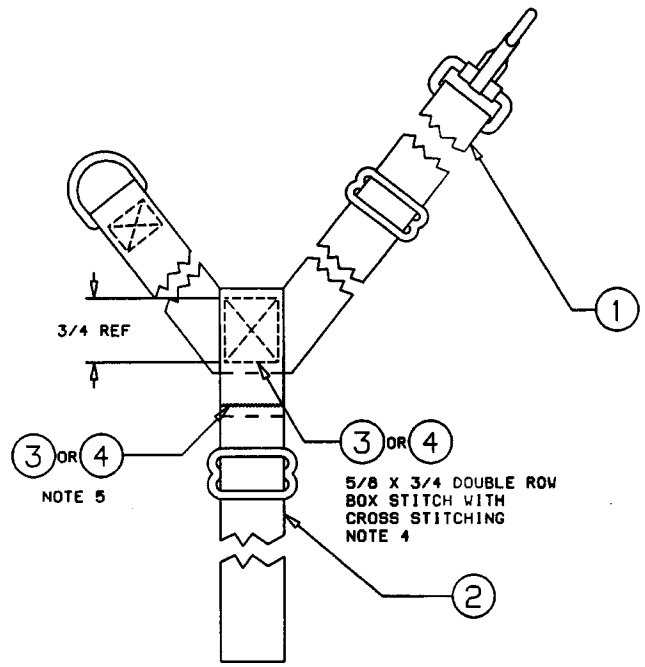

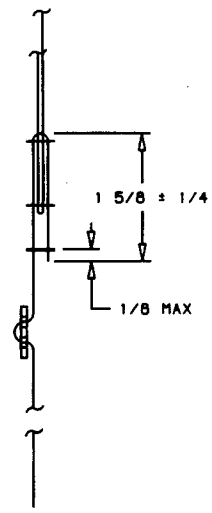

QTY REQD	DWG SIZE	DRAWING OR PART NO.	NOMENCLATURE OR MATERIAL	SPECIFICATION	ITEM NO.
A/R			THREAD, NYLON, TYPE I OR II, SUBCLASS B, SIZE F-4, COLOR OLIVE DRAB S-1	V-T-295	4
A/R			THREAD, POLYESTER, TYPE I OR II, CLASS 1, SUBCLASS B, SIZE F, COLOR OLIVE DRAB S-1	V-T-285	3
1	C	5-1-1978	NECK STRAP, SHORT		2
1	D	5-1-1979	NECK STRAP, LONG		1

PARTS LIST

APPLICATION	
DWG SIZE	NEXT ASSY
D	5-1-1971
END ITEM CODE NO.	
Z55	
213	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON:
2 PLACE DECIMALS ± .04
3 PLACE DECIMALS ± .010
FRACTIONS ± 1/8
ANGLES ± 0° 30'

MATERIAL

ORIGINAL DATE (YR-MO-DA): 92-01-10
DRAWN BY: CG
CHECKER: JSR
SUBMITTED: WILLIAM FRITCH
DESIGN APPROVAL: STEVEN KAMINSKY
DRAWING APPROVAL: J.S.RICHARDSON
CONTRACT NO.

U.S. ARMY ARMAMENT, MUNITIONS & CHEMICAL COMMAND
CHEMICAL RESEARCH, DEVELOPMENT AND ENGINEERING CENTER
ABERDEEN PROVING GROUND, MARYLAND, 21010-5423

NECK STRAP ASSEMBLY

SIZE	CAGE CODE	DWG NO.
C	81361	5-1-1977

SCALE NONE SHEET

June 29, 2004 4:46 PM